

FlexiDraft™ FRIDGE

# UNDERCOUNTER 40

**NEW**  
IMPROVED  
QUALITY



DEDICATED TO  
DRAFT QUALITY

## FlexiDraft™ FRIDGE

# UNDERCOUNTER 40


### INSIGHT

The UNDERCOUNTER 40 fridge is prepared to be integrated into an existing bar setup and combines all the benefits of a full branded FlexiDraft™ font with an accurate, energy efficient and eco-friendly fridge.

FlexiDraft™ UNDERCOUNTER 40 includes pre-drilled holes for external CO<sub>2</sub> supply and are available with a range of optional accessories including keg slider function, interior lighting and door lock.

The FlexiDraft™ UNDERCOUNTER is designed to be used with the industry standard sized 20, 30 and 50 l kegs. FlexiDraft™ UNDERCOUNTER 40 can be specified with 2 or 4 fonts and comes with adjustable legs for perfect fit.

### KEG CONFIGURATION - 2 CHAMBERS (EXAMPLES)




### FEATURES AND BENEFITS

- Prepared for font illumination
- Adjustable legs

**ADD-ONS**

- Door lock
- Slider function
- Interior light

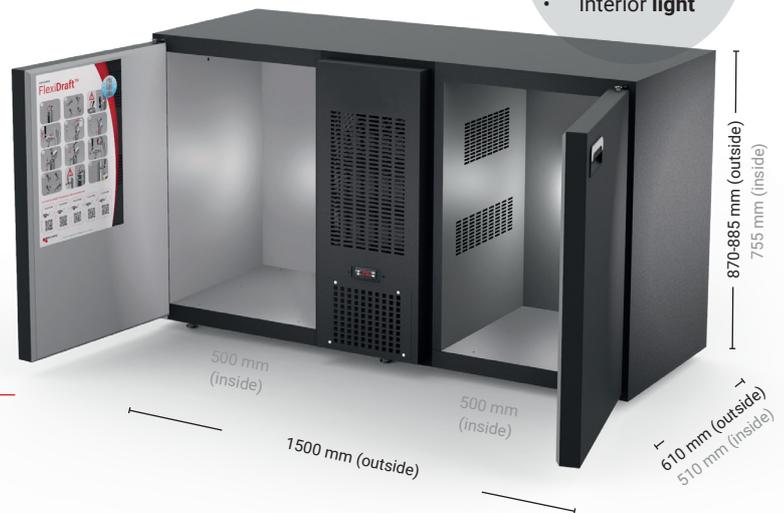

### SPECIFICATIONS FlexiDraft™ UNDERCOUNTER 40

|  |  |                    |
|--|--|--------------------|
| Number of fonts                            | 2-4 fonts                                  |                    |
| <b>Cooling:</b>                            |  |                    |
| Power of compressor                        | 110V: 854 watt - 230V: 724 watt            |                    |
| Coolant type                               | R290                                       |                    |
| Coolant amount                             | 99 g                                       |                    |
| <b>Performance:</b>                        |  |                    |
| Ambient temperature max                    | 40°C                                       |                    |
| Cooling temperature                        | 2°- 4°C                                    |                    |
| <b>Electrical:</b>                         |  |                    |
| Main supply/ Run current                   | 110V - 60Hz / 7,8A - 230V - 50/60Hz / 4,2A |                    |
| Plug compatibility                         | Type A, B, C, F, G, H, I, J, K, L, M, N, O |                    |
| Energy consumption (at 24°C ambient temp.) | 5,4 kWh/24h                                |                    |
| <b>Noise level:</b>                        |  |                    |
| Specification                              | 48-55 db (A), 0,5 m from the cooler        |                    |
| <b>Dimensions of cooler:</b>               |  |                    |
| Width                                      | Outside: 1500 mm                           | Inside: 2 x 500 mm |
| Depth                                      | Outside: 610 mm                            | Inside: 510 mm     |
| Height (incl. legs)                        | Outside: 870-885 mm                        | Inside: 755 mm     |
| Weight                                     | 139 kg                                     |                    |
| Legs                                       | Adjustable height 15-30 mm                 |                    |